


**** PRELIMINARY ****

The DA-CV™ Component video distribution amplifier family will provide a clean, compact and high quality interface to allow component video sources to be conveniently distributed.


High Definition Analog Component Distribution Amplifiers:

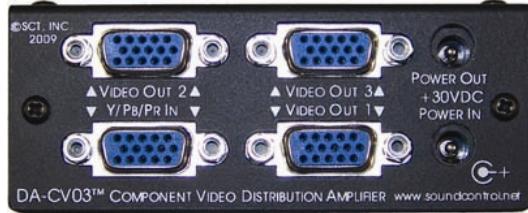

DA-CV03™ Rear View



DA-CV03™ & DA-CV02SC™ Front

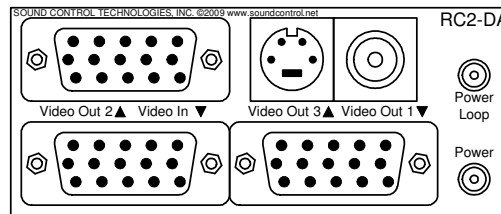

View DA-CV02SC™ Rear View (Preliminary)

Version dependant configurations are either the DA-CV03™ with one Y/Pb/Pr input distributed to three Y/Pb/Pr outputs or the DA-CV02SC™ with one Y/Pb/Pr input distributed to two Y/Pb/Pr outputs, one S-Video output and one Composite Video output.

Cables

Cable	Description	Connectors
DA-001	1' Component Video Cable	HD DB15 > HD DB15
DA-002	3' Component Video Cable	HD DB15 > HD DB15
RC2-102	Y/Pb/Pr break out Cable	6' HD DB15 > 3 BNC
RC2-10x	Y/Pb/Pr break out Cable	3' HD DB15 > 3 BNC
RC2-10x	Y/Pb/Pr break out Cable	6' HD DB15 > 3 RCA
RC2-10x	Y/Pb/Pr break out Cable	3' HD DB15 > 3 RCA

General Specifications:

Dimensions: 1.6"H x 3.5"W x 3.4"D
 Power Supply: 30 VDC (optional); Loop cable provided

Connections:

Power 5.5mm x 2.5mm, center positive
 Video Input High density DB-15 Female
 Video Output 1 High density DB-15 Female
 Video Output 2 High density DB-15 Female

DA-CV03 Video Output 3 High density DB-15 Female

DA-CV02SC S-Video Output 4-Pin mini DIN
 Composite Video RCA Type

Rack Mount Option RC1-RK1 4 mounting positions in 1 rack unit

Technical specifications are subject to change. Please contact SCT to determine if there are any changes that may apply to your applications. All Trademarks are the property of their respective owners. No claims made.