




### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

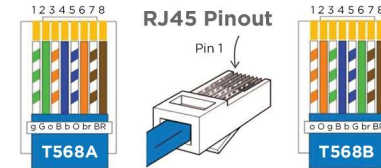

### RCU2E-HE™ Front Panel

Field-Upgradeable microSD Slot

### RCU2E-HE™



**RCC-H016-1.0M**  
RJ45 (RCU2E-CE™) to RJ45

**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**RCC-M004-1.0M**  
USB-B (RCU2S-HE™) to USB-A

**RCC-M014-1.0M**  
USB-B (RCU2E-HE™) to USB-C

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



### Poly Studio E70




**RCC-M005-0.3M**  
USB-A (RCU2S-CE™) to USB-C

**RCC-C002-0.3M**  
RJ45 (RCU2S-CE™) to RJ45

**PPC-001-0.3M**  
DC Power Plug (RCU2E-CE™)  
To DC Power Plug

### RCU2E-CE™

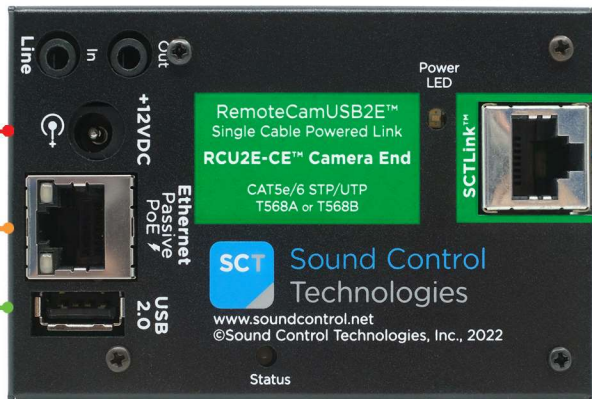

### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

### Poly G7500

