



## RemoteTableKit™ RTK-AM1™ Application Guide

Updated: 07/08/2024

### RTK-AM1™ Transmitter Module



\*Cables Included with Poly IP Table Microphone and TC8/TC10



Poly TC8/TC10




RCC-M015-2.0M USB-C to USB-C USB Cable

WPS-48V4A 48VDC  
100-240V 47-63Hz  
Power Supply

**SCTLink2™ Cable\***  
Ethernet/POE; Cisco Mic Pro; HDMI;  
Audio I/O & USB up to 100m CAT6A U/FTP  
The **SCTLink™** cable must always be  
a single, point-to-point CAT cable with  
no couplers or interconnections.

### RTK-AM1™ Receiver Module

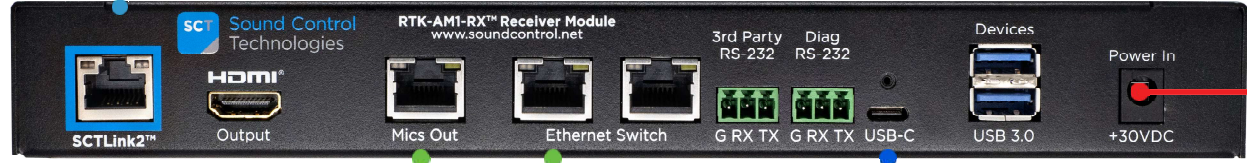

WPS-12 30VDC  
100-240V 47-63Hz  
Power Supply


[2] RCC-H016-1.0M RJ45 to RJ45 UTP Cable

RCC-M015-1.0M USB-C to USB-C USB Cable

\*SCTLink2™ Cable Specs  
Integrator-Supplied CAT6A U/FTP Cable  
EIA568A or EIA568B (10m-100m min/max Length)



Poly G62

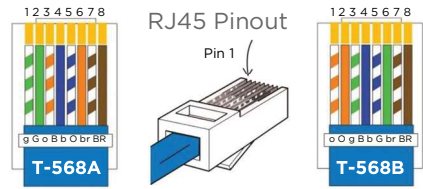

**Module Weights & Dimensions**  
RTK-AM1™ TX: (18.5oz) H: 1.30" (33mm) x W: 10.5" (267mm) x D: 4.5" (115mm)  
RTK-AM1™ RX: H: (16.5 oz) 1.30" (30mm) x W: 10.1" (257mm) x D: 4.5" (115mm)