Sound Control Technologies

RemoteTableKit™ USB-PDI™ [RTK-PLUS™] Application Guide

Updated: 07/23/2024

RTK-Transmitter™ Table Module

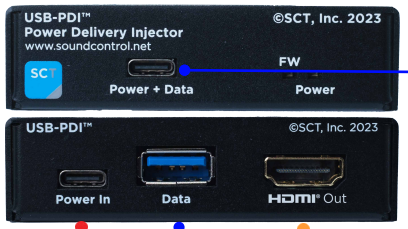

RCC-M015-2.0M
USB-C to USB-C

Laptop

Cisco Microphones
Supports up to [3] Cisco Mics:
Cisco Mic 20 & Cisco Table-J

Cisco Touch10/Navigator
Ethernet/POE
Cisco Provided

RCC-M006-1.0M
USB Micro-B (RTK-PLUS TX) to
USB A (USB-PDI)

RCC-H001-1.0M
HDMI to HDMI

SCTLink™ Cable*
Ethernet/POE; Cisco Mic TRRS; HDMI;
Audio I/O & USB up to 100m CAT5e/CAT6

The **SCTLink™** cable must always be
a single, point-to-point CAT cable with
no couplers or interconnections.

WPS-USBC-65W
USB-C Power Supply

RTK-Receiver™ Codec Module

USB-A Cable
Partner Supplied

HDMI to USB Convertor
Partner Supplied

Cisco Codec Plus, Room 55, Room 55 Dual,
~Room 70 G1, Room 70 Dual G1

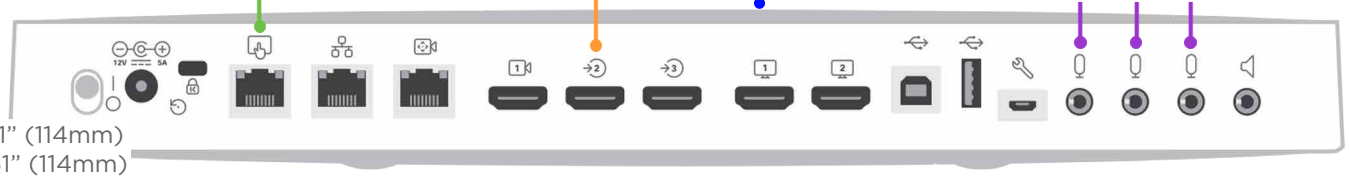

*SCTLink™ Cable Specs
Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

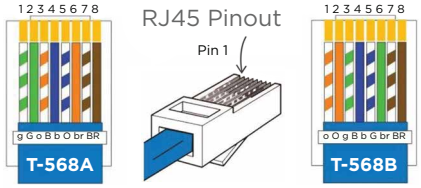

Module Dimensions
RTK-TX™: H: 1.39" (35mm) **x W:** 10.22" (259mm) **x D:** 4.51" (114mm)
RTK-RX™: H: 1.39" (35mm) **x W:** 10.22" (259mm) **x D:** 4.51" (114mm)