



SCTLink™ Cable Specs
Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

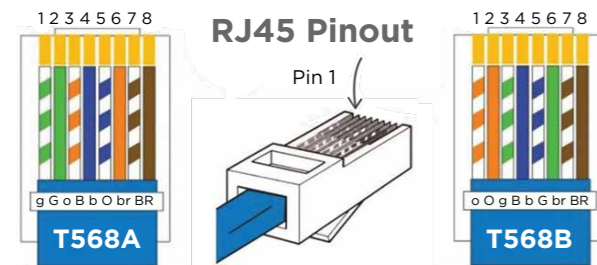

RCC-C005-0.3M
Serial Visca + Power Patch

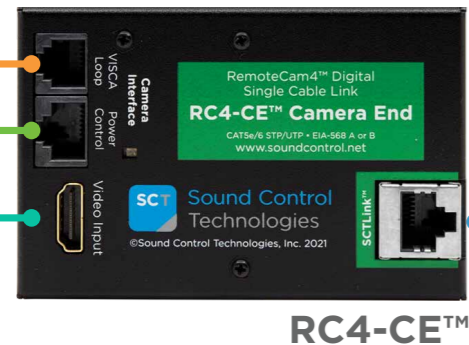


RCC-C001-0.3M
HDMI to HDMI

AVer CAM520 Pro



PPC-022-0.3M

RJ11 to 5.5mm x 2.1mm

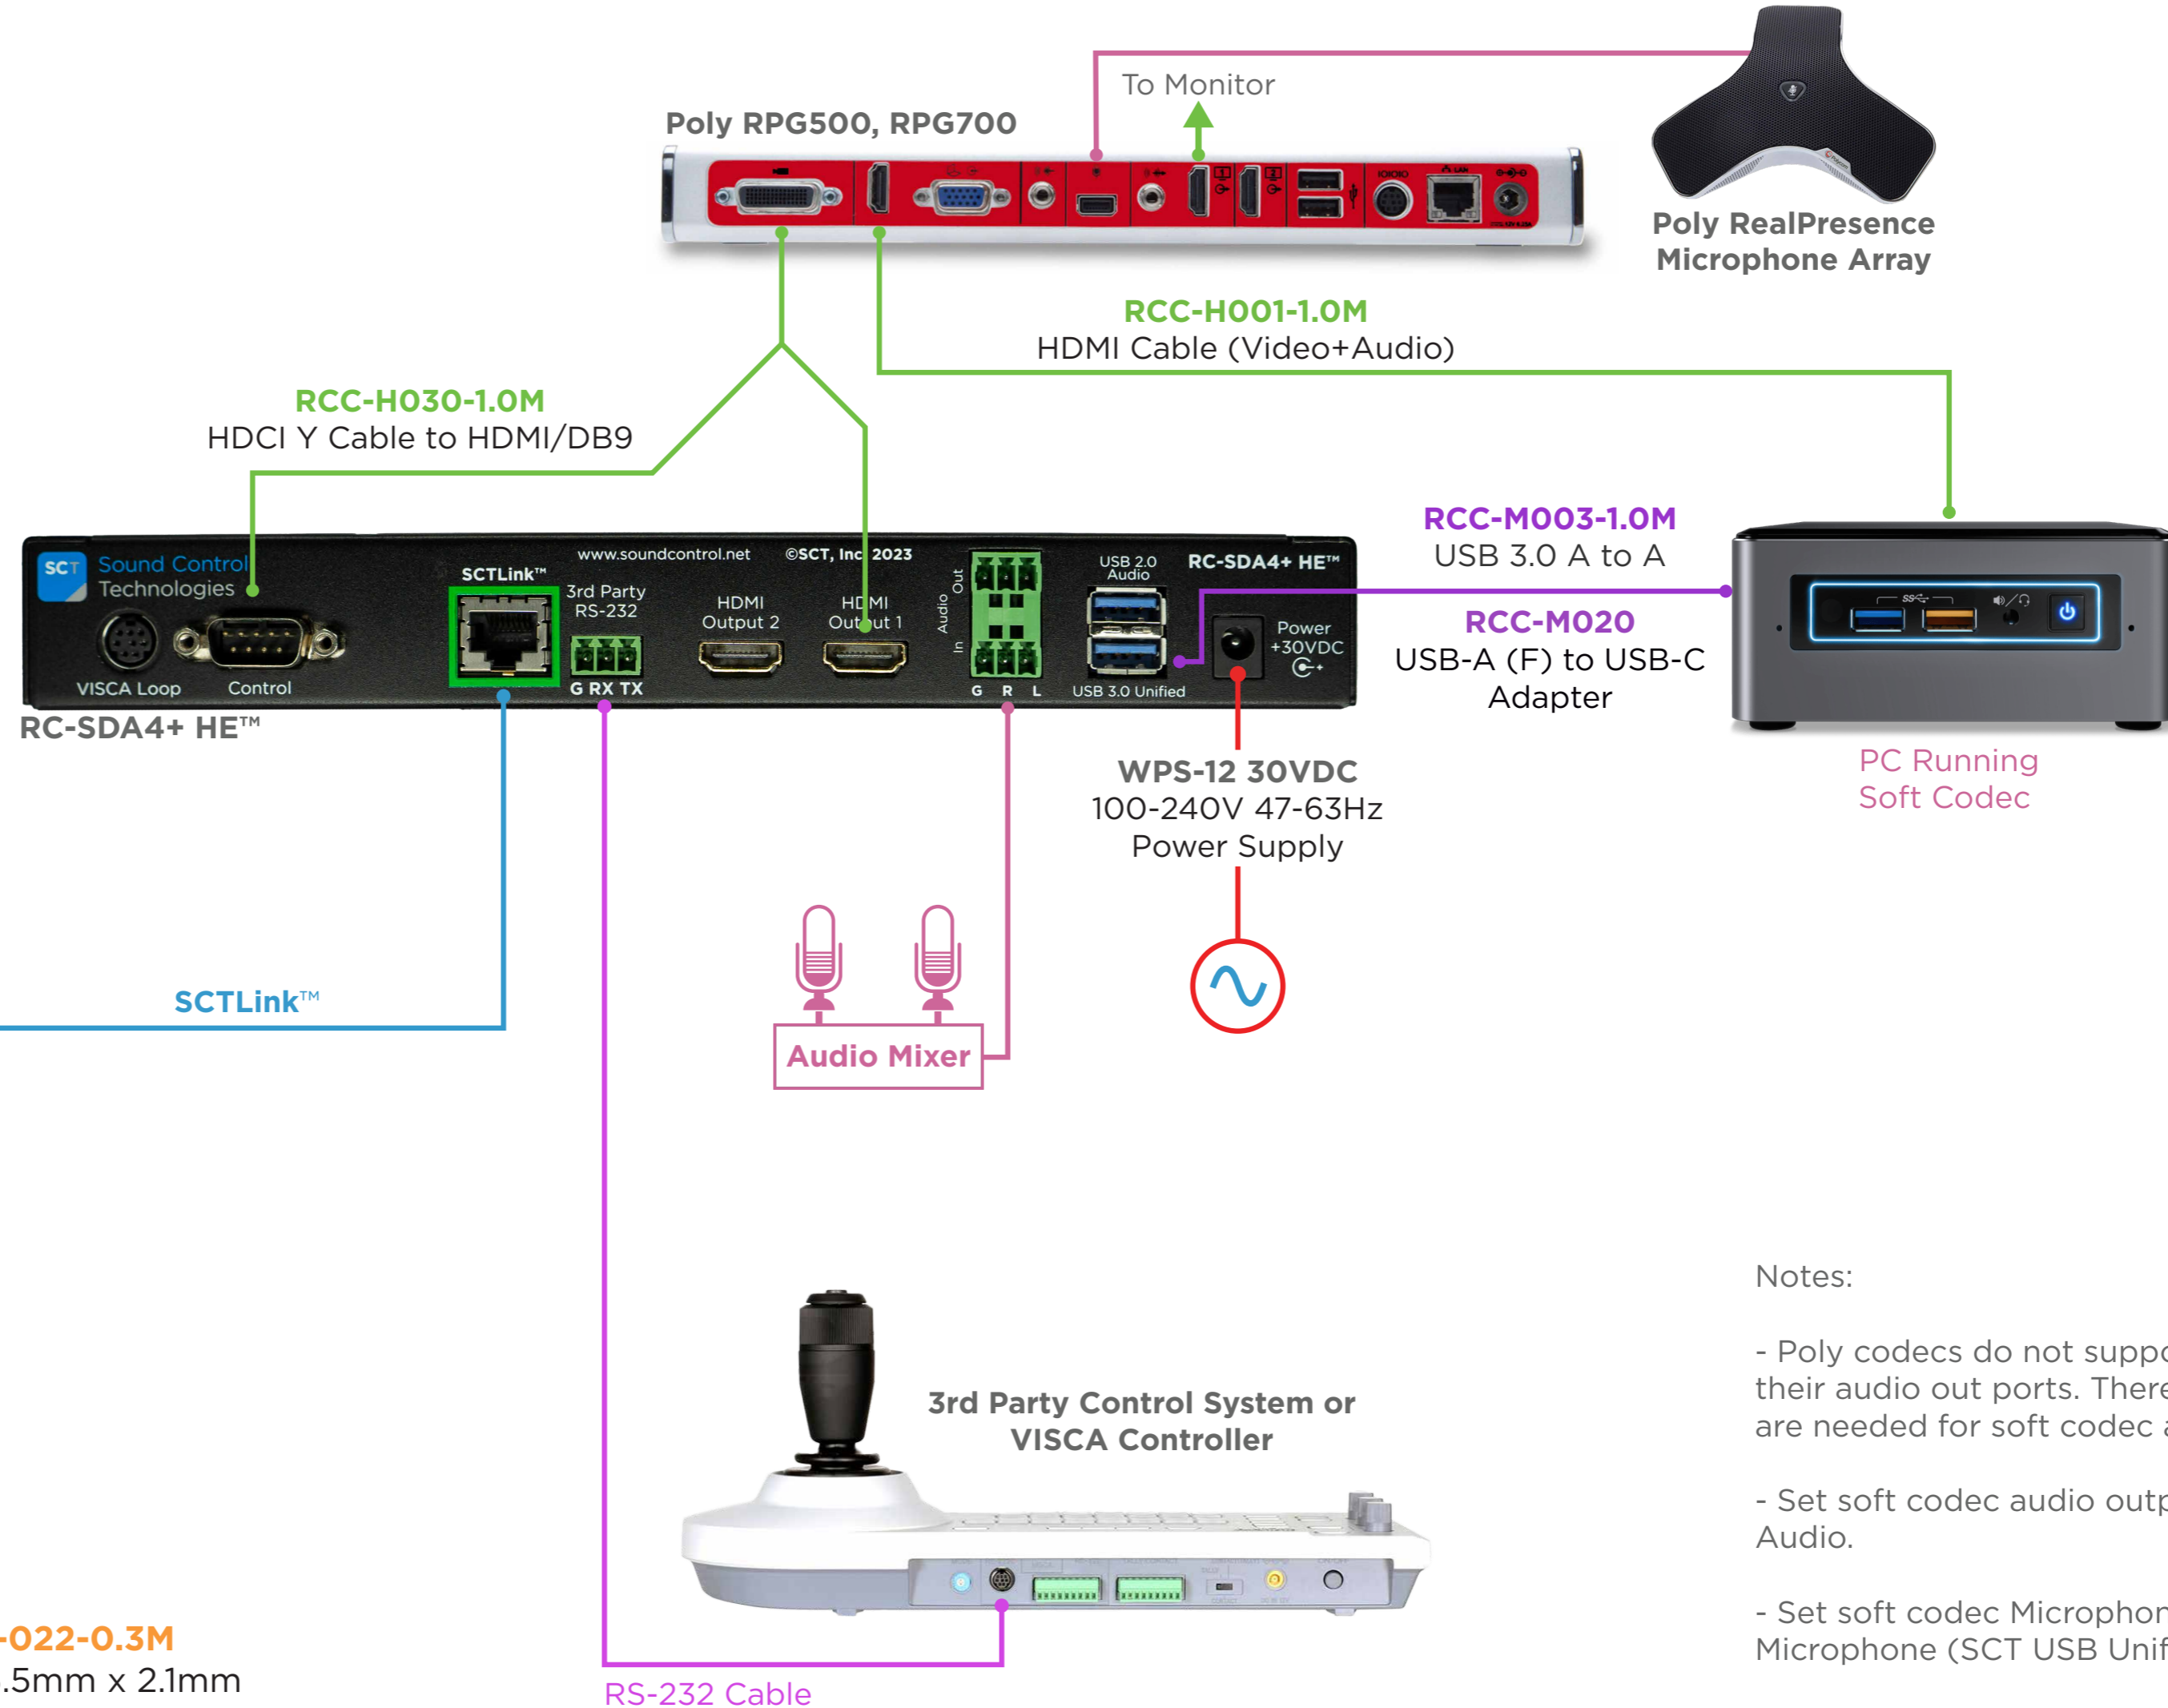

Notes:

- Poly codecs do not support room mic audio on their audio out ports. Therefore additional mic(s) are needed for soft codec applications.
- Set soft codec audio output to HDMI/Display Audio.
- Set soft codec Microphone device as: Microphone (SCT USB Unified Audio)